

ROADFIX®.CA

High Performance Cold Asphalt For Permanent Road and Carriageway Repairs



ROADFIX® COLD ASPHALT is a deferred set, storage grade Asphalt that is ideal for instant, high quality repairs to Bituminous or concrete surfaces.

ROADFIX® COLD ASPHALT Incorporates the latest Cold Asphalt Technology out of Europe to provide an easy product to use to provide a Permanent

Available in 6mm grade **ROADFIX®** Cold Asphalt can be used for carriageway and footpath repairs, patching reinstating and temporary surfacing.

With a need to find a cost effective product **ROADFIX®** Cold Asphalt provides an immediate solution to **dry** and **wet** potholes and utility cuts in roads, drives, car parks and many other surfaces including wet areas.



ROADFIX® Cold Asphalt is a combination of penetrable grade bitumen, additives and selected aggregates.

ROADFIX® Cold Asphalt can be stored in bulk and has a minimum 2 year shelf life whilst remaining workable in cold weather

ROADFIX® COLD ASPHALT

FEATURES:

- Stockable in Bulk.
- Long Shelf life.
- Available in Bulk loads or 20kg bags.
- Workable down to -10° C.
- Permanent repair no revisits.
- Flexible, can be used in asphalt or concrete surfaces.
- Durable against rain/freezing damage and rutting.
- Extended range of aggregates can be used.
- Emulsion based versions can be mixed on site.
- Equipment and labour savings.

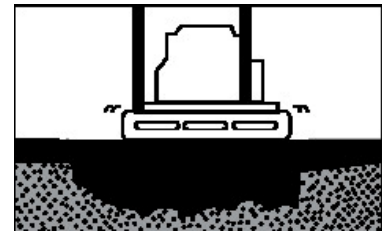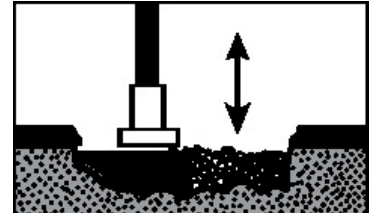

BENEFITS:

- No Cutting necessary.
- No disposal of cuttings.
- No tack coat priming.
- No over banding joint sealing.
- No heavy compaction equipment required.
- No trips to the Hot Mix plant.
- No wastage at the end of each day's tasks.
- No heating required.
- Limited Carbon footprint.

Preparation

Clean the repair area of loose debris and dust, remove any excess water.

Application

Lightly work the Bag of ROADFIX ® before applying it to the work area.

Level out the ROADFIX ® to the desired level a depth of 45mm will compact to 30mm.

Coverage

As a rule of thumb at a depth of 20-30mm it will cover an area of **0.6 Sq m.**

- 6mm grade ROADFIX ® CA achieves 20-60mm wearing coat

Compaction.

Where possible use a thumper or compactor in an emergency you can use your vehicle tyres.

Precautions.

Avoid excessive contact with Skin, use gloves. If the skin becomes contaminated, clean using an approved petroleum based abrasive hand cleaner/gel.

Any contact with the eyes, they should be irrigated with copious amounts of water and seek medical attention.

Storage/ Shelf life/ Special notes.

ROADFIX ® CA has a shelf life of up to two (2) years in all conditions, from extreme cold, heat to wet conditions. You will notice that the ROADFIX ® will form a type of hard skin in or out of the package, and this protects the main body of the product from degradation. This skin easily re-juvenates and mixes back in with little agitation.

Australian Water & Irrigation Solutions Pty Ltd

A: PO Box 98 Bayswater Vic 3153

P: + 61 3 9720 2803 : + 61 9729 0121

M: David Sidebottom 0417 052 443 E:david@awis.com.au

M:Terry Ryan 0412 854 241 E: terry@awis.com.au