

316 SS REPAIR CLAMPS Multi Part DN300-DN600

Full Circle, Multi part Repair Clamps


Suitable for pipes from Dn 300mm to Dn 600mm Rapid Multi part type repair clamps can be supplied in various lengths to suit your needs. The armour plate's span allows an outside diameter range of up to 10mm per segment

A standard range is always available and we can manufacture specials to suit non standard pipe OD's.

The Rapid Multi part Repair Clamp is a quick economical and efficient method to repair damaged pipes, with Pinholes perforations Cracks and broken backs.

Technical Data: Size range: DN 40mm to DN300mm **Max Operating Pressure:** 1600Kpa
Max Operating temperature: 60°C **Relevant Standard:** AS 4181.

316 SS Repair bands are constructed from 316 Stainless Steel and have a fully line rubber mat designed to insulate the pipe and protect it from galvanic corrosion.

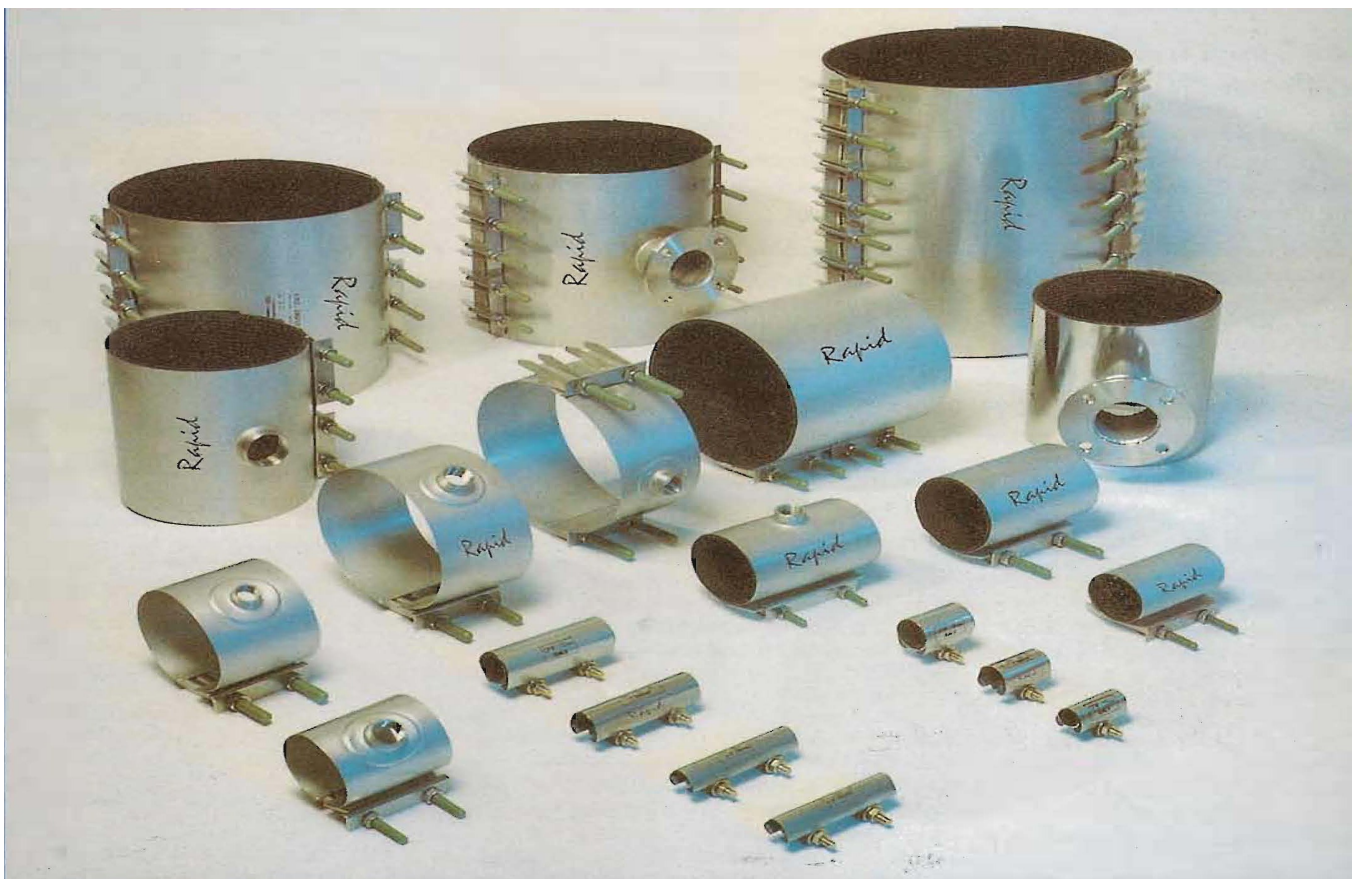

MATERIAL SPECIFICATION & STANDARDS

316 SS Repair Clamps are designed and manufactured under Quality Management System, certificate to ISO9001:1994.

- ◆ **Body : 316Stainless Steel S ASTM A240M**
- ◆ **Bolts, Nuts and Washers: 316Stainless Steel ASTM A240M**
- ◆ **Sealing Gasket : Nitrile AS 16456 AS/NZS 4020**
- ◆ **Working Pressure: 1.6MPa. Working Temperature: 0 to 60 Degrees C**

Nominal Pipe Size mm	Outside Diameter range mm	Part Number
350-400	350-370	CR2-350/370 -(X)
	370-390	CR2-370/390-(X)
	390-410	CR2-390/410-(X)
400-500	400-420	CR2-400/420-(X)
	420-440	CR2-420/440-(X)
	440-460	CR2-440/460-(X)
450-500	450-470	CR2-450/470(X)
	470-490	CR2-470/490-(X)
	490-510	CR2-490/510-(X)
500-550	500-520	CR2-500/520-(X)
	520-540	CR2-520/540-(X)
550-600	540-560	CR2-540/60-(X)
	550-570	CR2-550/570-(X)
600-750	570-590	CR2-570-590-(X)
	590-610	CR2-590/610-(X)
	600-620	CR3-600-620-(X)
	620-640	CR3-620-640-(X)
	650-680	CR3-650-680-(X)
	690-720	CR3690-620-(X)
	720-750	CR3-720-750-(X0)

Disclaimer: While every effort has been made to ensure that the information in this brochure is correct and accurate. Users of AWIS Pty Ltd provided product or information within this document must make their own assessment of suitability for their particular application. Product dimensions are nominal only, and should be verified if critical to a particular installation. No warranty is either expressed, implied, or statutory made by AWIS Pty Ltd Products unless expressly stated in any sale and purchase agreement entered into between AWIS Pty Ltd and the

Distributed by AWIS Pty Ltd



A: PO Box 98(1/15 Stud Rd) Bayswater VIC 3153

P: +61 3 9720 2803

F: +61 3 9729 0121

M: David- 0417 052 443 Terry-0412 854 241

E: david@awis.com.au terry@awis.com.au